



FEATURES AND BENEFITS



ICON KEY ON SECOND PAGE

- ➔ Assembled in modules for easier transportation and installation.
- ➔ Profiles are connected via heavy-duty steel wire for added durability.
- ➔ Reversible closed surface aluminium entrance matting.
- ➔ Suitable for indoor use.
- ➔ Two surface options: Rubber profiles with nylon filaments / Rubber scraper profiles.
- ➔ Custom-made to order.
- ➔ Accessories available.
- ➔ Single or double wiper available.

Technical Specification


| | |
|--------------------------|---|
| Uniclass | Pr_35_57_11_26 Entrance mats |
| CAWS | N10 / 300 Entrance Matting |
| Material | Aluminium rails, Buffed rubber strips or Black rubber strips. |
| Surface Finish | Nylon filaments or black rubber inserts |
| Product Height | 12mm Low Profile, 18 mm Standard Profile |
| Durability | Heavy to very heavy traffic entrances |
| Environmental Resistance | Suitable for dry environments |
| UV Resistance | Yes |
| Typical Applications | Entrance areas |
| Installation Method | Installed into recessed well |
| COO (Country of Origin) | NL |

To achieve a uniform appearance consider hoovering the product in a single direction. Slip resistance specifications are based on the correct direction of travel i.e. perpendicular to the channels and inserts.


STYLES AND COLOURS




**EXCO C
Single Wiper
Black**




**EXCO C
Single Wiper
Grey**




**EXCO C
Single Wiper
Rubber**



**EXCO C
Double Wiper
Black**




**EXCO C
Double Wiper
Grey**



**EXCO C
Double Wiper
Rubber**

ZONES

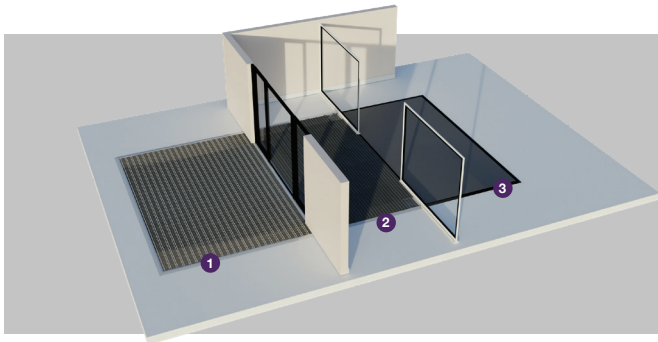

Zones


We recommend a zoning system when choosing your entrance matting. Whether your entrance extends outdoors or is fully covered, creating three zones delivers optimum dirt barrier performance, ensuring interior floors are kept clean and hazard free.



| Light | Medium | High | Very High | Light | Medium | Heavy Duty | Max Duty | Dirt | Moisture |
|---|--------------------------------------|--|---------------------------------------|---|--|----------------------------------|--|----------------------------------|---------------------------------|
| Less than 80 people per hour 3-4 metres | Up to 300 people per hour 6-7 metres | Around 600 people per hour 8-10 metres | Over 5,000 people per day 9-12 metres | Suitcases, Wheelchairs | Supermarket Trolleys, Sack barrows, Luggage trolleys | Supermarket Cages, Pallet Trucks | Forklift Trucks, Hydraulic Cranes | Most Effective Against Dirt/Soil | Most Effective Against Moisture |
| Pedestrian Traffic | | | | Wheeled Traffic | | | Contaminants | | |
| It is important that matting is a sufficient length to allow moisture and debris to be wiped off footwear as people walk across the mat. Our team recommends a minimum of six footsteps for this to be effective. | | | | Depending on the nature of the building, the entrance may have to contend with different types of wheeled traffic. It is important that all matting complies with DDA Regulations/The Equality Act, so that wheelchairs can safely move on and off. | | | All of our products protect you against contaminants, but some products are more effective than others for removing either dirt or moisture. Use these icons to determine which. | | |

INSTALLATION

**EXCO C Entrance Matting Low Profile
Installed in a recessed well**

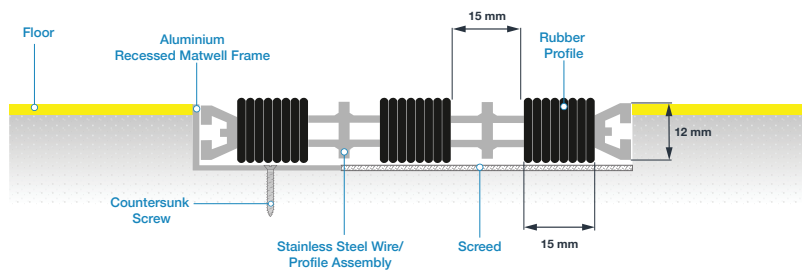

**EXCO C Entrance Matting Standard Profile
Installed in a recessed well**

